

3 Inch Aluminum Nose Cone

- Machined Aluminum
- Fits most Sullivan starters, and many other brands

Instructions


- 1) Remove rubber nose cone from starter.
- 2) Remove the nut located inside the cone, by turning it counterclockwise. We recommend using a 7/16" deep socket with a ratchet handle.
- 3) Hold the shaft behind the cone using nose or locking pliers. Turn the nose cone with your other hand until loose. During manufacturing we use locktite on the threads. If necessary, apply heat to the shaft to loose the loctite.
- 4) Test fit the 3" Cone to the shaft of the starter. Mark the shaft where the set screw will attach and file a flat. This will provide better hold for the set screw. Apply a small amount of loctite to the screw and secure with a hex wrench.

3" Inch Nose Cone Inserts (Not Included with S630 Aluminum Cone)

Soft, high grip silicone reversible rubber inserts for the Megatron Starter.

No. S636 (Red): For 1-3/4" to 3-1/2" Spinners


No. S637 (Green): For 2-1/4" to 6" Spinners

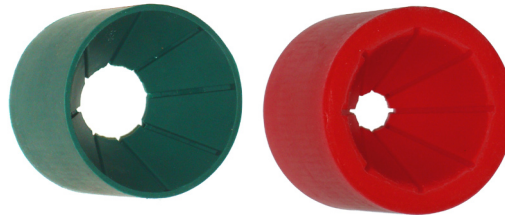

Other Sullivan Starter Accessories

Heavy Duty Starter Cord.

15 feet of stranded copper 10 gauge 24V power cord. Suitable for the Megatron and all larger starters. No. S653



PowerPac Battery Case.

Holds 12 Sub-C NiCad batteries for as much starting power as a motorcycle battery. Fits all Sullivan starters as well as most other brands. Features glass reinforced construction and universal steel brackets. No soldering required. Charger included. No. S640

(Batteries not included)

