


Tailwheel Bracket Instructions

Mount the white bracket to the end of the fuselage with 4-40 bolts. This is easier to do before covering and assembling the horizontal stab. Align the axis of the tailwheel pivot close to the axis of the rudder hinges. Choose one of the springs for steering stiffness, substitute music wire for the springs. For a castoring tailwheel, eliminate the springs or music wire.

Insert the short end of the steering spring through the collar and bend the end to lock it in place. The spring should slide back and forth through the collar to absorb mounting misalignment.

Bend the long end of the steering spring up where you want to glue it into the rudder. Trim to length and glue in place.

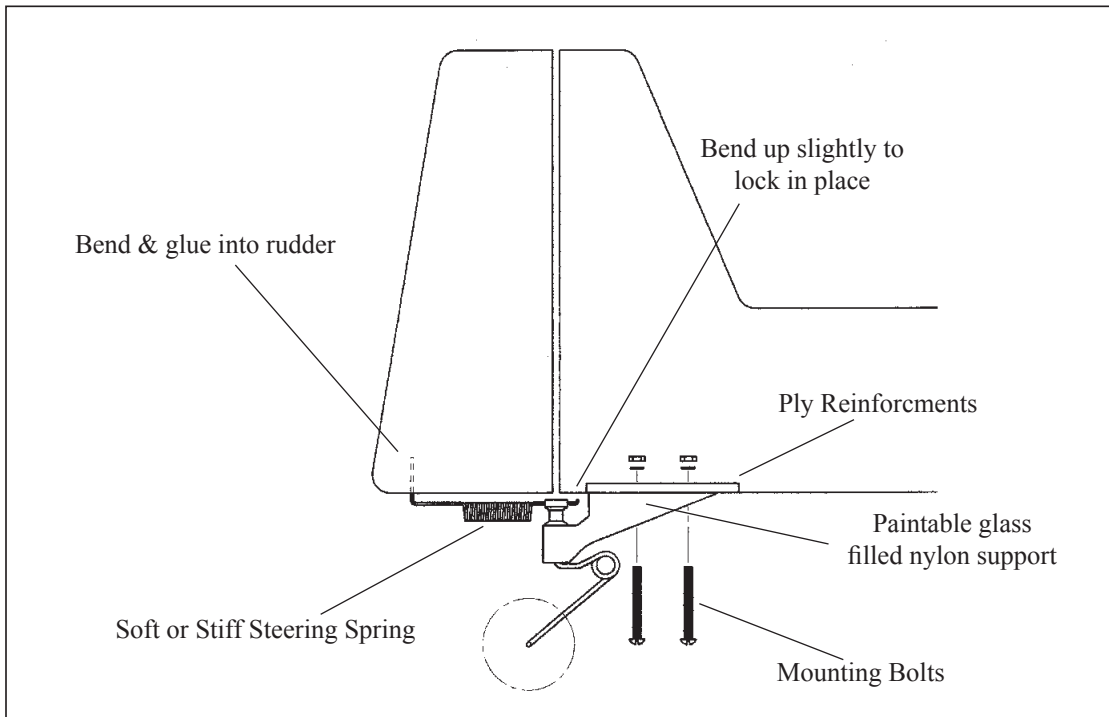

One North Haven Street Baltimore, MD 21224 USA

410-732-3500

sullivanproducts.com